


HERRINGBONE

SPC FLOOR CONSTRUCTION

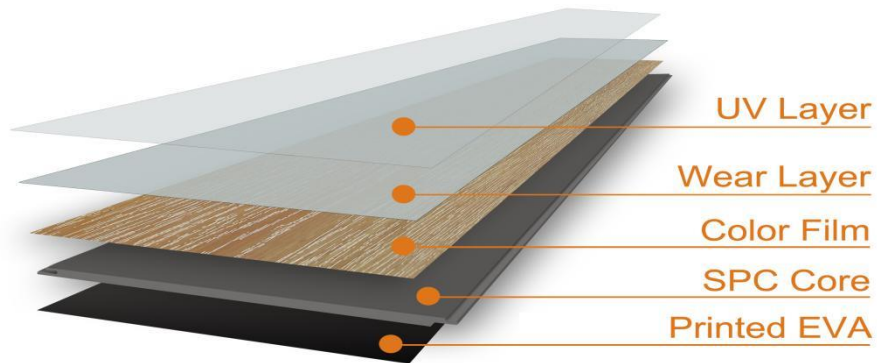

SPECIFICATION

SPC FLOOR	615*123*6.5mm	
Test item(s)	Test method(s)	Test result(s)
Static Load Limit	ASTM F970-17	Residual Indentation: 0.02mm
Dimensional stability	ASTM F2199-18	Length Direction:-0.02% Width Direction:-0.03%
Wear resistance	EN 13329:2016 Annex E	Average abrasion cycles:5200 revolutions Abrasion class:AC4
Static Coefficient	ASTM D 2047-2011	Static coefficient of friction: Dry condition: 0.41 Wet condition: 0.56